

HOT WATER GENERATOR

High pressure



For high pressure washer
with petrol, Diesel or electric engine

Automatic Start/Stop
pressing the trigger of the
spray gun, the circulation of
water automatically triggers
the burner, and it stops when
releasing the trigger.



MAIN FEATURES

- ▶ Pressure safety
- ▶ Automatic Start/Stop

USE


- 1) Connect the high pressure washer to the water mains.
- 2) Connect the HP washer to the generator thanks to the hose supplied
- 3) Connect the HP hose and the lance on the outlet of the generator
- 4) Turn the generator on
- 5) Set the temperature thanks to the generator's thermostat

SPECIFICATIONS

- Engine : 220 V single phase electric engine
- Electric cable : 5 m
- Boiler : steel coil
- Fuel oil burner
- Thermostat : for temperature regulation
- Fuel tank capacity : 11 l
- Valve : pressure safety
- Pressure switch : pressure safety
- Flow switch : lack of water safety
- Frame & hood : welded steel frame, epoxy paint
- Hood : stainless steel
- Rubber-tyred wheels
- Swivel castor : with break

STANDARD EQUIPMENT

- Connection hose : 3 m special high pressure hose between HP washer and generator

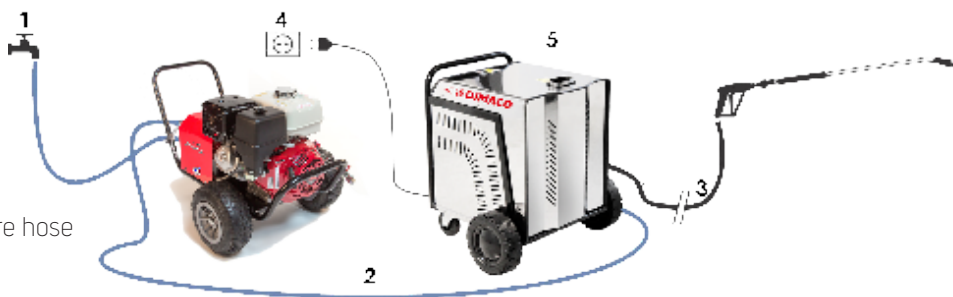

MODEL

	FOR HP WASHER				
REFERENCE	MAX. FLOW RATE		PRESSURE	TEMPERATURE	WEIGHT
	l/min	l/h	bar	°C	kg
AQUA 1400P	21	1 260	250 max.	60/90 <i>Depending on the flow of the cleaner</i>	80

