

Double foam kit for efficient application of foam

● SPECIFICATIONS

- Ready to plug-in kit
- Stainless steel adjustable injector
- 90° maximum

● FIELDS OF APPLICATION

- Transport
- Garages
- Food industry
- Material (agriculture - Construction industry)

● STANDARD EQUIPMENT

- 450 mm lance with foam head
- Product injection valve
- 3 m connection hose
- Suction hose with inlet filter
- Metal stand, epoxy paint
- Connectors for all brands

Shampoo can not included.

● USABLE PRODUCTS


- Any type of foaming product
except chlorinated or abrasive products

● OPERATION


- The Double Foam kit plugs directly on the outlet of a HP washer or on the mains.
- It enables application of foam through the lance fitted with the foam head.
- Rinsing and high pressure washing are made with the accessories of the high pressure washer tipping over the product injection valve.

MAIN FEATURES

- ▶ Management of the quantity of product injected thanks to the dosage adjuster
- ▶ Great foam quality

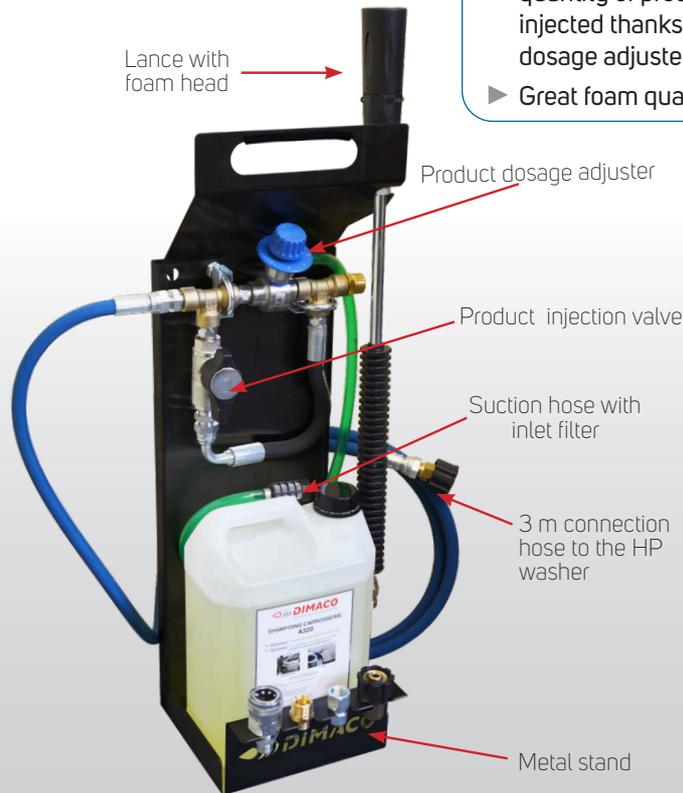

Mobile use

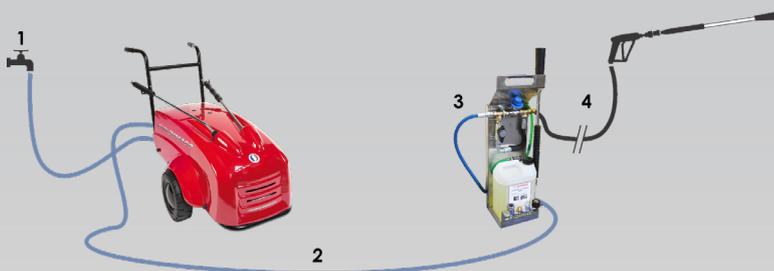

Wall-mounted use of product barrel of 220 l



REFERENCE	FOR HP WASHER		DESCRIPTION
	RATE	PRESSURE	
KITDUOMOUSSE	Up to 21 l/min max.	250 bar max.	For the application of foam with product dosage adjustment
KITDUOMOUSSEGD	From 26 l/min	250 bar max.	



**Watch our
demonstration
video**

