MISTING Small and medium surfaces



Hydrobrum'

MAIN FEATURES

- Easy setting
- Sturdiness
- Run and stop times
- easy to read on screen



FUNCTIONS

- ► On/Off switch
- Schedules for stop and run times
- Parameters memorized in case of power cut

NEW GENERATION

Crankshaft pump with 3 ceramic pistons

SPECIFICATIONS

- Crankshaft pump with 3 ceramic pistons
- Silent 1450 rpm single phase electric motor
- Galvanized plate
- Anodized aluminium hood
- Built-in wall 5µ bowl filter
- Water flow : 4 l/min at 70 to 105 bar
- Nozzles : 20 For other quantities please ask us
- Weight : 32,5 kg
- Dimensions : 45 x 37 x 37 (cm)


• STANDARD EQUIPMENT

- 2 coils of 25 m hose
- 20 nozzles
- 21 nozzle holders
- 1 bend for direction change
- 2 end of line caps
- 40 fastening collars
- 2 T-square bypass
 - 1 bowl filter + holder
 - 1 beginning of line connector

O))) DIMACO

- 1 junction
- 2 caps
- 1 hose cutting pliers



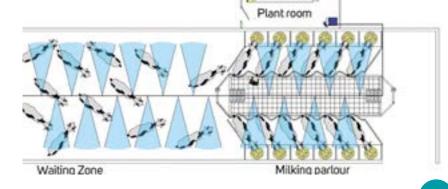

MISTING - SPRAYING VACUUMING