

THREE PHASE HP WASHERS

Intensive series - Galvanized - Ref. : IG 30 170 E




Flector coupling
1 450 rpm

2026
Selection



MAIN FEATURES

- ▶ Long life pump
- ▶ Anti water hammer regulator
- ▶ Elastic coupling
- ▶ Pneumatic wheels
- ▶ Lance holders
- ▶ Wheelbarrow arms



OPTIONS

- ▶ 1 - Turbo lance
- ▶ 2 - Hose extension
- ▶ 3 - Sanding kit


SPECIFICATIONS

- Crankshaft pump (radial), 3 ceramic pistons
- Pump safety : VST (thermal safety valve)
- Regulator : separated from the manifold
- Flector coupling : increased elasticity of the motor-pump coupling
- Engine : three phase electric engine
- Magneto-thermal circuit breaker
- Electric cable : 5 m
- Frame and hood : galvanized welded steel

SELECTION EQUIPMENT

- Steel hose reel on galvanized tipping frame
- Hose : 20 m 3/8 double metal braided hose
- HP gun : with swivel link (on hose side)
- 900 mm double lance adjustable high & low pressure
- Lance : 700 mm with turbo nozzle **FOR FREE**
- Quick coupling on the outlet of the pump
- Pneumatic wheels : Ø 400 mm

MODEL

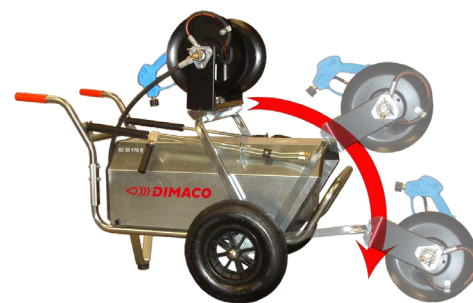

Use :



Semi-pro Professional Intensive Super Intensive

REFERENCE	FLOW RATE		PRESSURE	POWER			PUMP		WEIGHT	DIMENSIONS
	l/min	l/h		bar	HP	kW	rpm	Brand		
IG 30 170 E	30	1800	170	12	9,2	1450	INTERPUMP	15W40	145	131 x 77 x 105



SAT DIMACO Constructeur, ZI, 15 rue Gustave Eiffel, 37500 CHINON (France) - Tél. + 33 (0)2 47 98 25 36

E-mail : export@dimaco.com - Site Internet : www.dimaco.com

V1 - vm

ELECTRIC