

Dimarock

Improves your working comfort



● SPECIFICATIONS


Latest generation flexible hose, **lightweight and highly resistant**, specially designed for use in abrasive environments.

Reinforcement: two layers of ultra-resistant steel wire braiding.


Coating: synthetic rubber resistant to abrasion, ozone and weathering.

Weight per metre: 300 g instead of 540 g for a standard hose.

- Temperature: -40°C to 100°C
- Working pressure: 345 bar max.
- Flow rate: 45 l/min max.
- Length: 20 m to 30 m
- 2 reinforced steel braids
- Nominal diameter: 3/8
- Internal diameter: 10 mm
- 2 female BSP end fittings

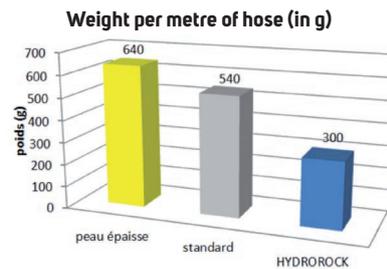

Twice as light as a standard hose

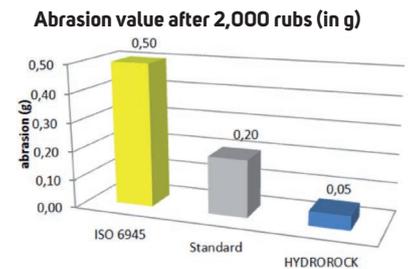

4 times more resistant to abrasion

REFERENCE	LENGTH (m)
DIMAROCK20	20
DIMAROCK25	25
DIMAROCK30	30

IMPORTANT

- If your Dimaco cleaner is equipped with a screw-on coupling, add the connector: 26025050
- If your Dimaco cleaner is equipped with a ball coupling, add the connectors: 26203561 and MBSP38MC38